



www.sdcsecurity.com service@sdsecurity.com
 [t] 800.413.8783 805.494.0622 [f] 805.494.8861
 801 Avenida Acaso, Camarillo CA 93012 • PO Box 3670, Camarillo CA 93011-3670

25 Series Electric Strike / Door Release

25 Series Electric Door Strike



- **Low Profile - 1.25" Backset**
- **Reversible Failsafe - Failsecure**
- **Latch Status Output Standard**

The SDC 25 Series Electric Strike is a Centerline Latch Entry* strike designed for use with Cylindrical lockset with up to 5/8" (15mm) throw latchbolts. The compact low profile design with an internally mounted solenoid and factory supplied mounting tabs enable quick and easy installation where jamb space is limited. The heavy duty construction makes the 25 Series ideal for high traffic installations.

***Centerline Latch Entry:** The latch must enter at the strike "Centerline" located exactly between the top and bottom of the strike faceplate. Refer to strike installation instructions and template to determine strike location prior to frame preparation for New and Retrofit installations. See SDC strike template and installation instructions for both retrofit and new installation details.



CE

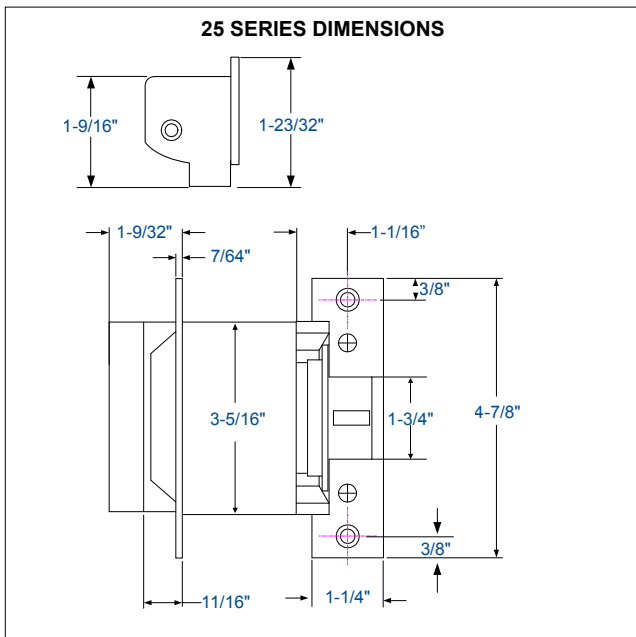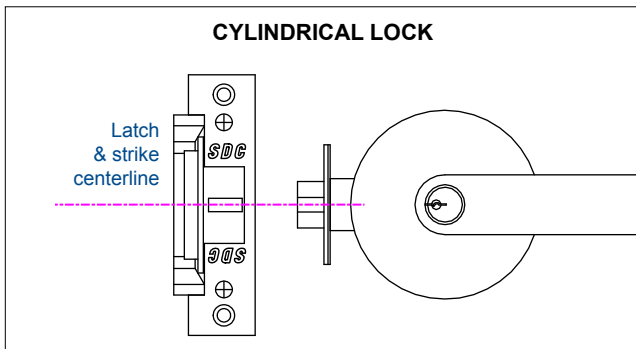

Features

- Fail-Secure, reversible for failsafe operation
- For 1/2" latch or 5/8" latch with 1/8" door gap
- Latch status output
- Non-handed, reversible
- All stainless steel parts with durable diecast body for corrosion resistance
- 630 Stainless steel standard finish

Model

25-4U: 4-7/8" (124mm) faceplate for aluminum, and hollow metal frames.

Options

- RMB** Buzzer 12/24V AC/DC operation
- BR64XL** Rectifier for AC operation

Specifications

Input: 300/150 mA @ 12/24VDC
Latch Status: SPDT, 3 Amp @ 30VDC
Dimensions: 1-1/4" W x 4-7/8" H x 1-1/4" D
 (31.8W x 124H x 31.8D mm)

5 YEAR LIMITED WARRANTY

SECURITY DOOR CONTROLS

sdsecurity.com
 service@sdsecurity.com

